

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	25
Ratio (i=)		56
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.37
Service factor		0.8
Rated Power P1	[kW]	0.31

Output data

Gear unit F RS 50 PC 56 71 B14 AC 24 B3

Type		RS - Worm speed reducers
Input type		F (Elastic coupling)
Size		50
Ratio (i=)		56
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	25
Rated output torque	[Nm]	84.8
Service Factor		0.8
Efficiency		0.6
Inertia moment	[kgm ²]	0.000047

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads





Ball bearings output radial load	[N]	2600
Taper bearings output radial load	[N]	3900
Ball bearings output axial load	[N]	520
Taper bearings output axial load	[N]	780

Accessories


Hollow output shaft	AC 24
---------------------	-------

Electric motor coupling

Size		71 B4
Poles n.		4
Power	[kW]	0.37

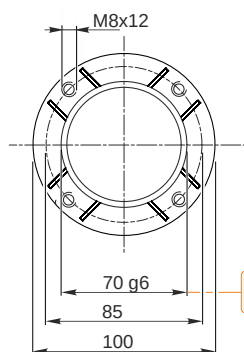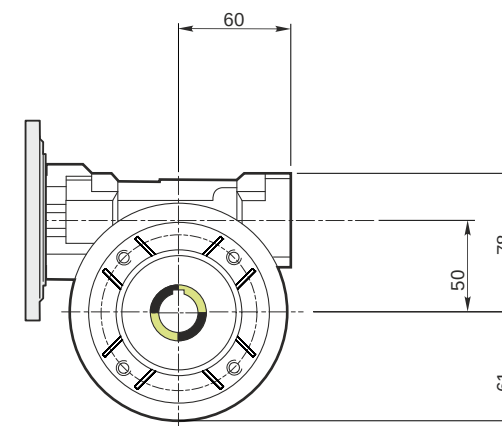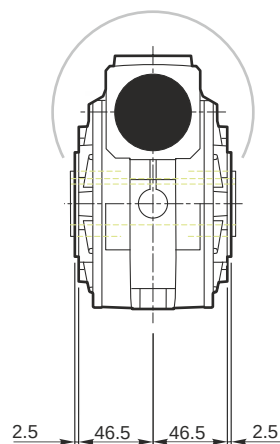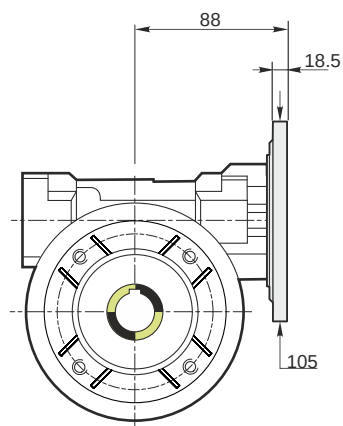






Hollow output shaft




69.99
69.971

24.021
24.000



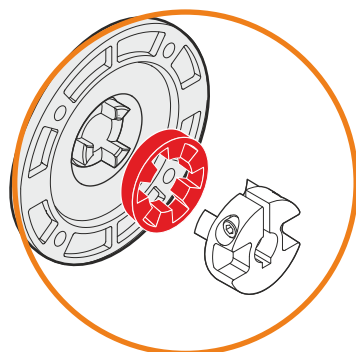


This gear unit is provided with an elastic coupling motor fitting

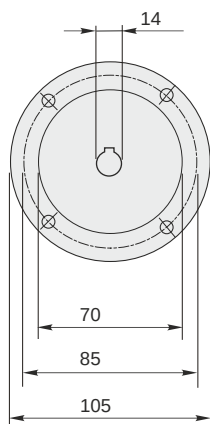


Mounting positions


B3




B6




B7




B8



V5



V6




0.13



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

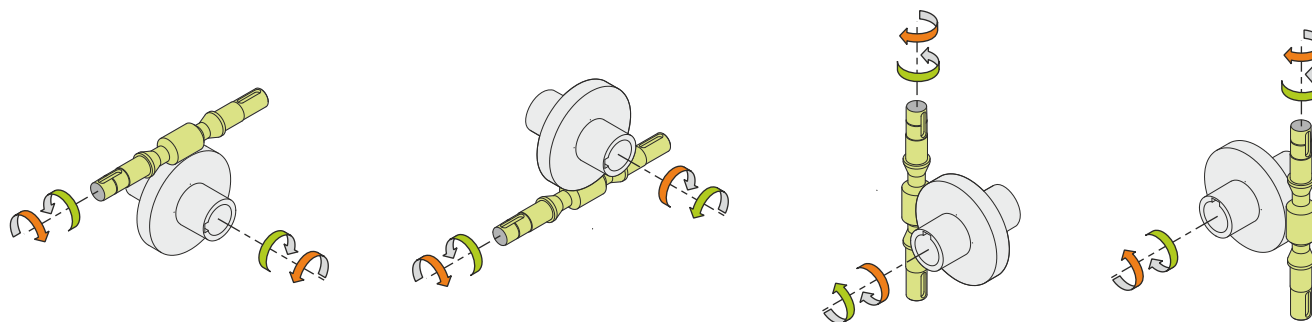

Weight

Gear unit [kg] 3.8

Gearing data

Axial module	1.4
Number of starts	1
Lead angle	3° 42'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving