

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	14
Ratio (i=)		100
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.09
Service factor		1
Rated Power P1	[kW]	0.09

Output data

Gear unit **M RS 40 PC 100 56 B14 AC 19 MT 0.09 kW 56 B4 B14 X3 B3**

Type		RS - Worm speed reducers
Input type		M
Size		40
Ratio (i=)		100
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	14
Rated output torque	[Nm]	28.24
Service Factor		1
Efficiency		0.46
Inertia moment	[kgm ²]	0.000018

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	2300
Taper bearings output radial load	[N]	2600
Ball bearings output axial load	[N]	460
Taper bearings output axial load	[N]	520

Accessories


Hollow output shaft	AC 19
---------------------	-------

Electric motor

Size		56 B4
Poles		4
Power	[kW]	0.09


Electric motor configuration

Motor flange	B14
Terminal box position	X3

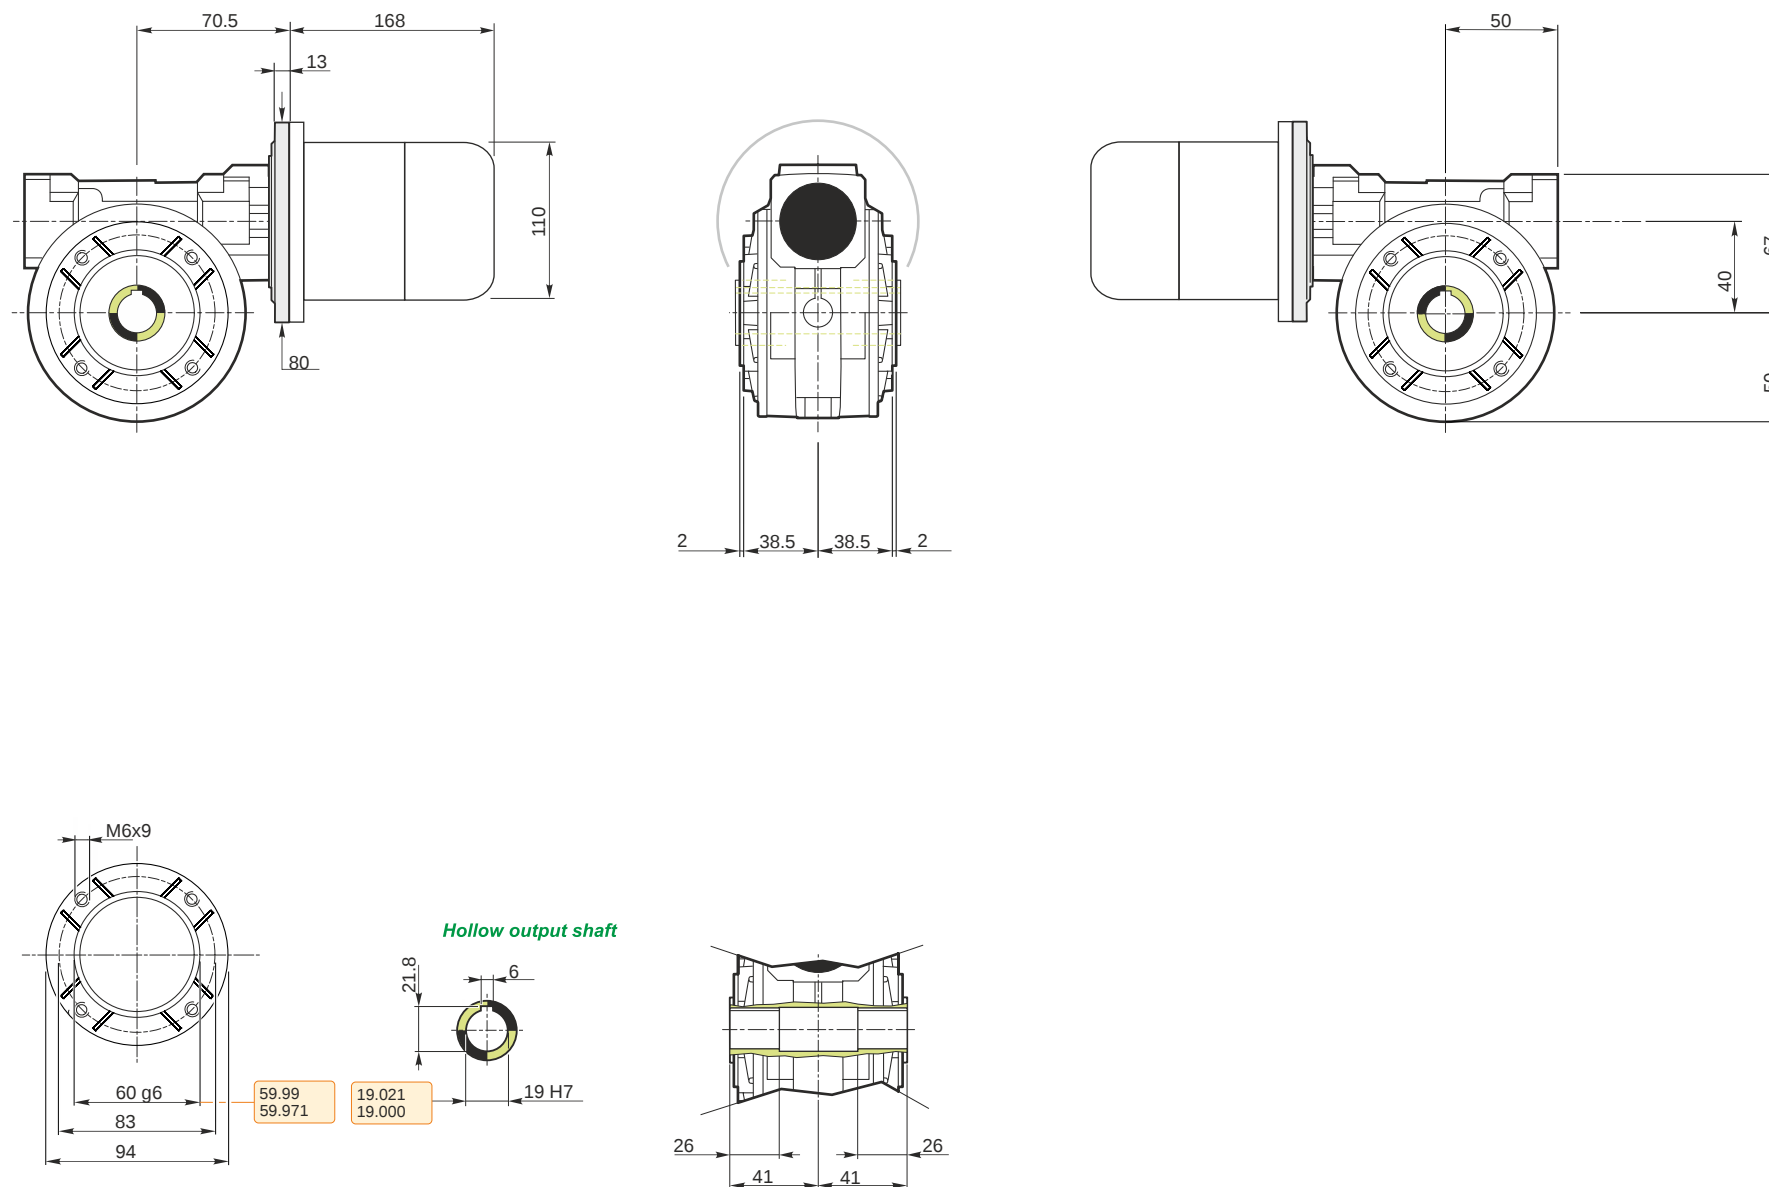


M RS 40 PC 100 56 B14 AC 19 MT 0.09 kW 56 B4 B14 X3 B3

Mounting positions

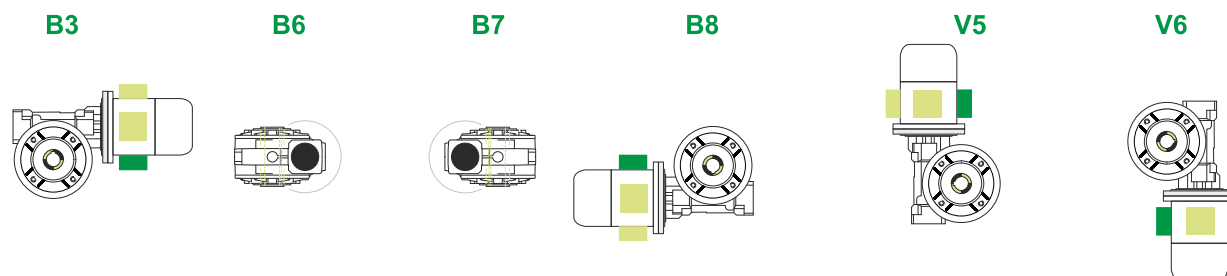

Terminal box position




0.08



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

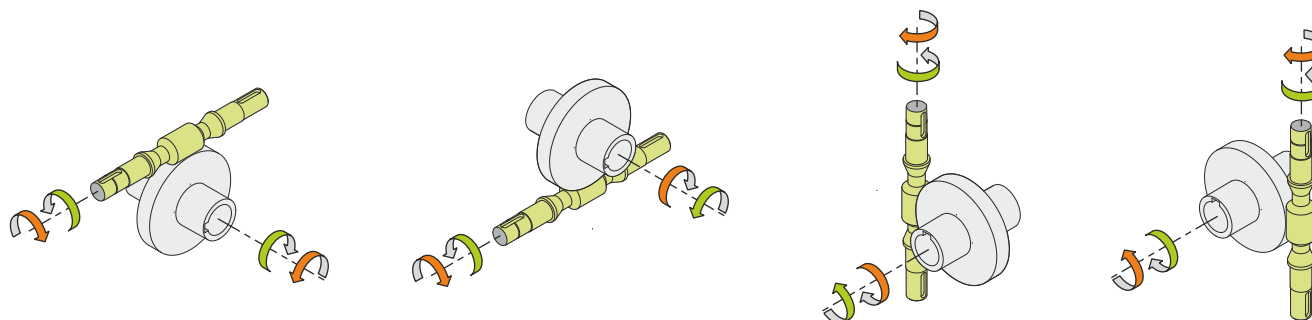

Weight

Gear unit [kg]	2.5
Electric motor [kg]	2.6

Gearing data

Axial module	0.65
Number of starts	1
Lead angle	2° 38'
Pressure angle	20°

Backdriving

Static self-locking
No back-driving
Low dynamic back-driving