

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	50
Ratio (i=)		28
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	5.5
Service factor		1.4
Rated Power P1	[kW]	7.48

Output data

Gear unit	M RS 130 PC 28 132 B14 AC 48 MT 5.5 kW 132 S4 B14 X3 B3
------------------	--

Type		RS - Worm speed reducers
Input type		M
Size		130
Ratio (i=)		28
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	50
Rated output torque	[Nm]	808.89
Service Factor		1.4
Efficiency		0.77
Inertia moment	[kgm ²]	0.002727

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	6600
Taper bearings output radial load	[N]	9900
Ball bearings output axial load	[N]	1320
Taper bearings output axial load	[N]	1980

Accessories


Hollow output shaft	AC 48
---------------------	-------

Electric motor

Size		132 S4
Poles		4
Power	[kW]	5.5


Electric motor configuration

Motor flange	B14
Terminal box position	X3

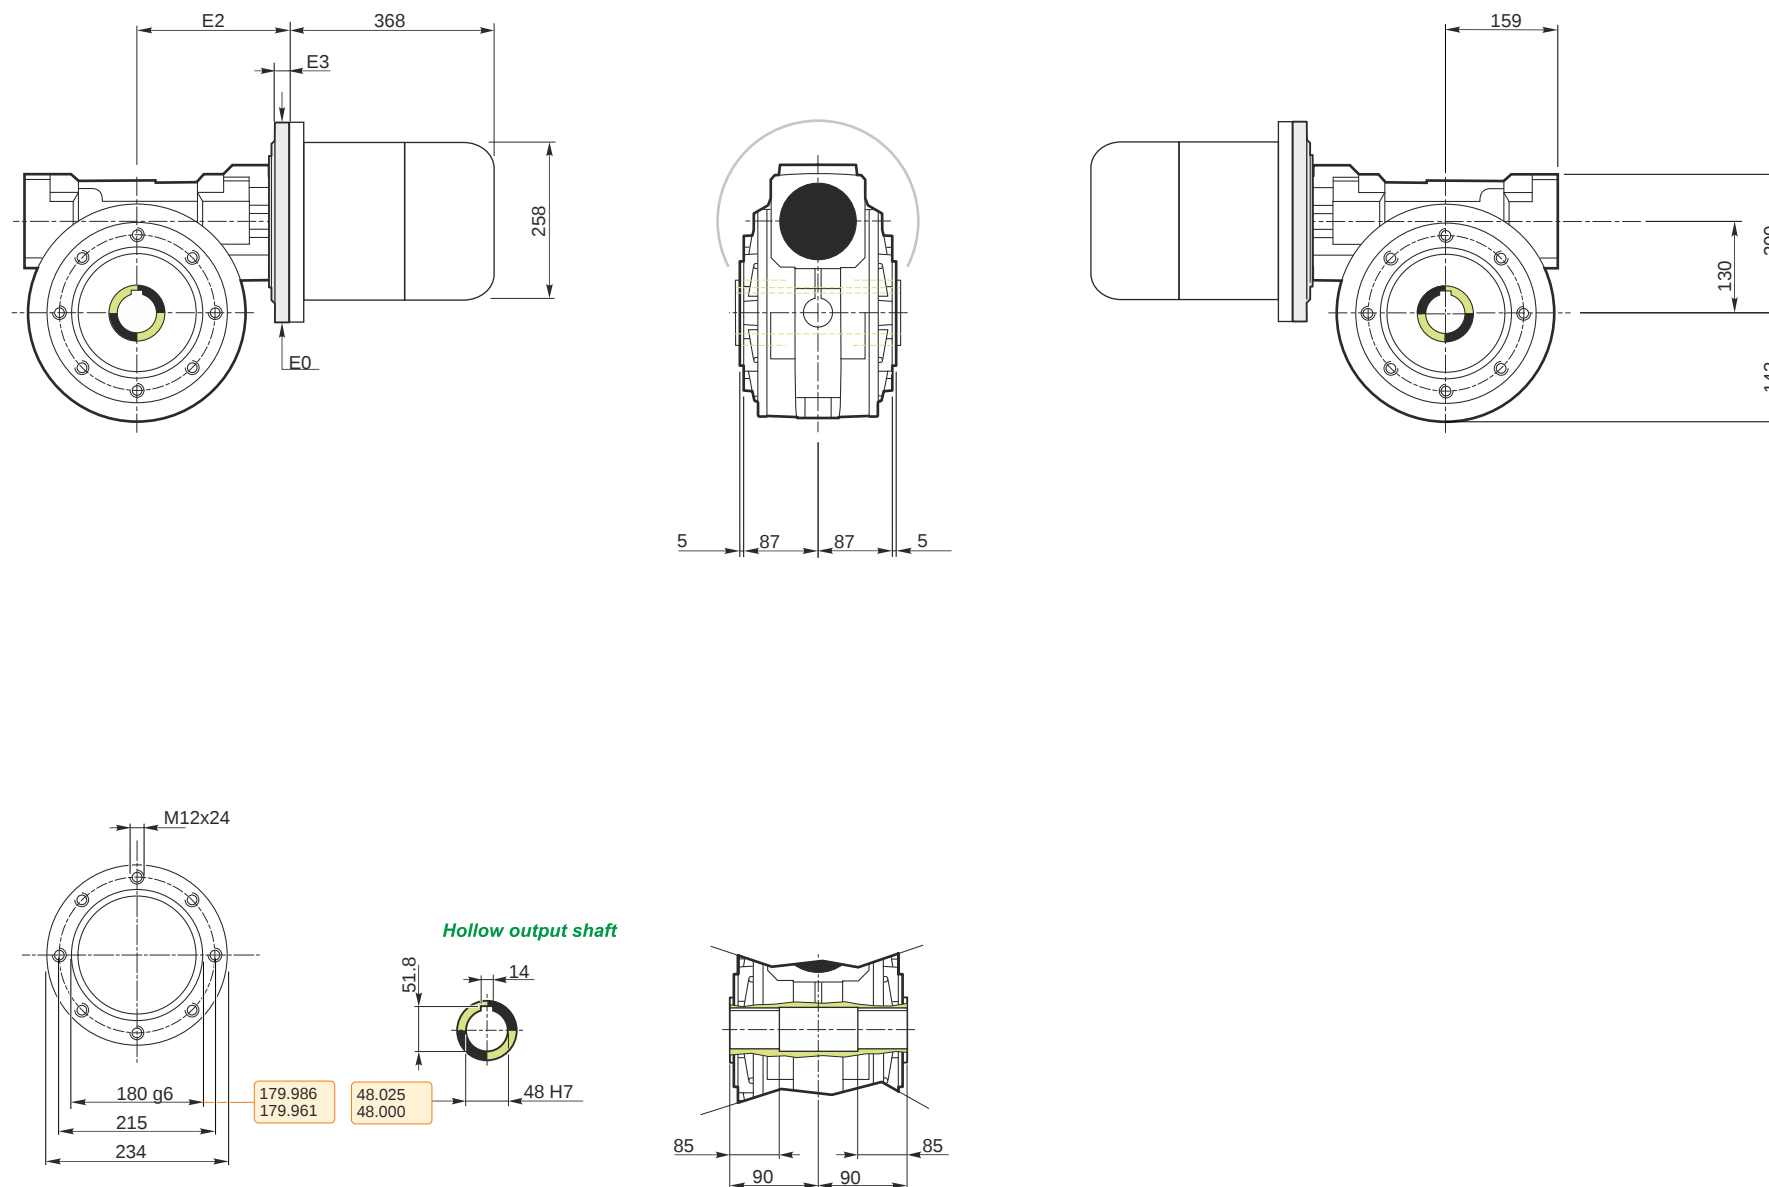

M RS 130 PC 28 132 B14 AC 48 MT 5.5 kW 132 S4 B14 X3 B3

Mounting positions

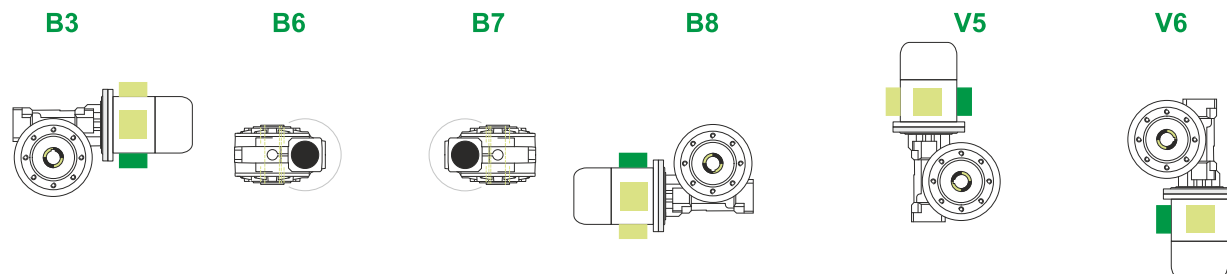

Terminal box position



2.75



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	50
Electric motor [kg]	43

Gearing data

Axial module	7.25
Number of starts	1
Lead angle	7° 14'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving