

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	53.87
Ratio (i=)		25.99
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	7.5
Service factor		1
Rated Power P1	[kW]	7.22

Output data

Gear unit	M RD 52 B3 H1 25.99 132 B14 AU 40x80 MT 7.5 kW 132 M4 B14 X3
------------------	---

Type		RD - Helical gearboxes
Input type		M
Size		52
Ratio (i=)		25.99
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	53.87
Rated output torque	[Nm]	1276.48
Service Factor		1
Efficiency		0.96
Inertia moment	[kgm ²]	0.001096

Gear unit configuration

Fixing		Feet
Output shaft		AU 40x80

Output radial and axial loads


Output radial load	[N]	9000
Output axial load	[N]	1800

Electric motor

Size		132 M4
Poles		4
Power	[kW]	7.5


Electric motor configuration

Motor flange		B14
Terminal box position		X3

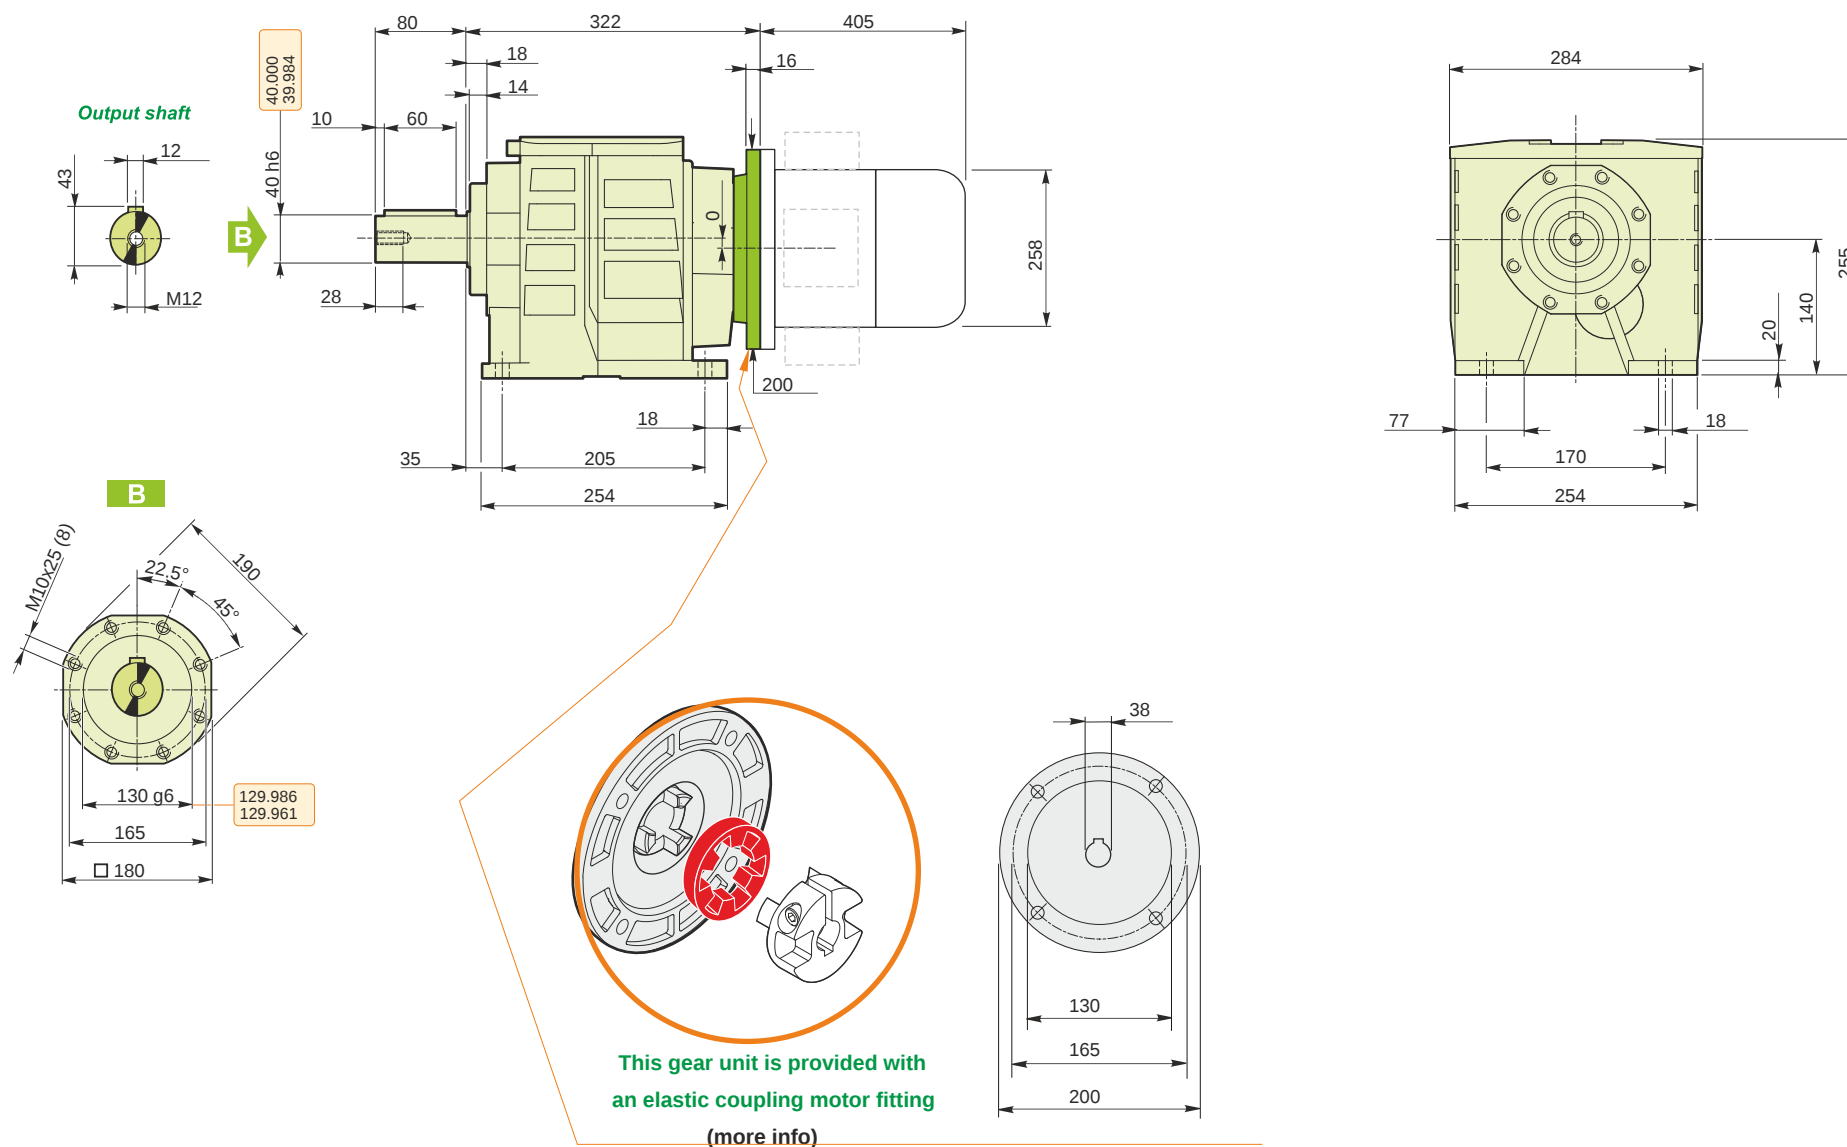

M RD 52 B3 H1 25.99 132 B14 AU 40x80 MT 7.5 kW 132 M4 B14 X3

Mounting positions

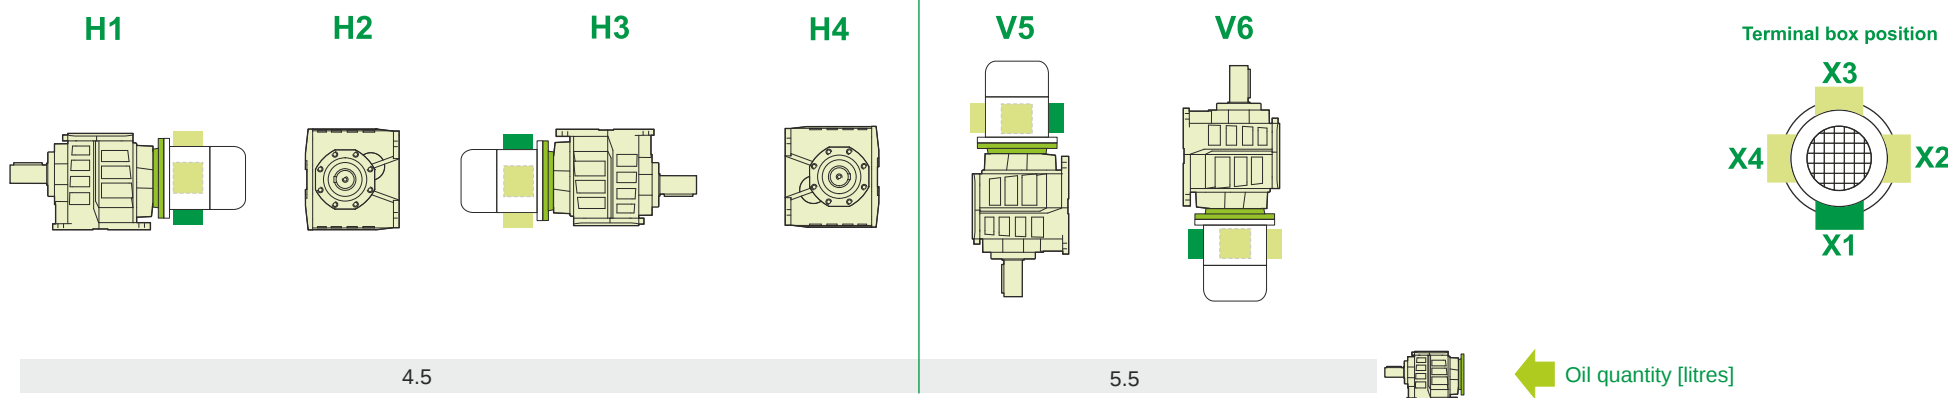

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	49
Electric motor [kg]	52

M RD 52 B3 H1 25.99 132 B14 AU 40x80 MT 7.5 kW 132 M4 B14 X3