

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	200
Ratio (i=)		7
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.37
Service factor		3
Rated Power P1	[kW]	1.11

Output data

Gear unit **M RS 40 PC 7 71 B14 AC 19 MT 0.37 kW 71 B4 B14 X3 B3**

Type		RS - Worm speed reducers
Input type		M
Size		40
Ratio (i=)		7
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	200
Rated output torque	[Nm]	15.02
Service Factor		3
Efficiency		0.85
Inertia moment	[kgm ²]	0.000022

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	1000
Taper bearings output radial load	[N]	1500
Ball bearings output axial load	[N]	200
Taper bearings output axial load	[N]	300

Accessories





Hollow output shaft	AC 19
---------------------	-------

Electric motor


Size		71 B4
Poles		4
Power	[kW]	0.37

Electric motor configuration

Motor flange	B14
Terminal box position	X3

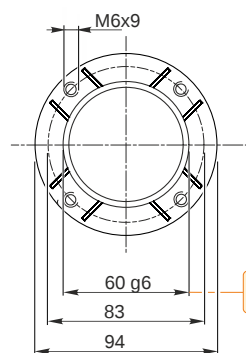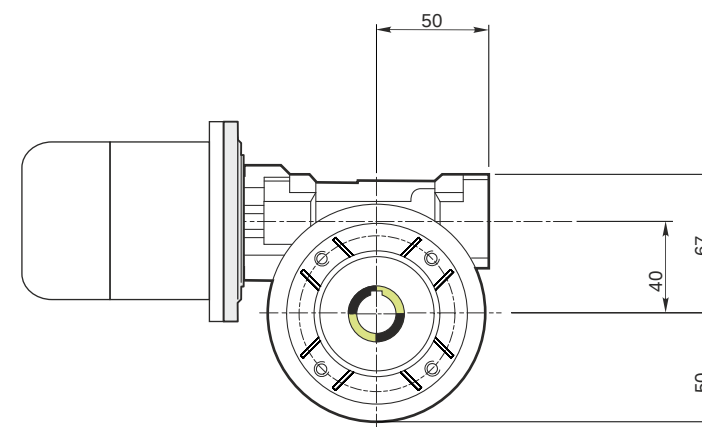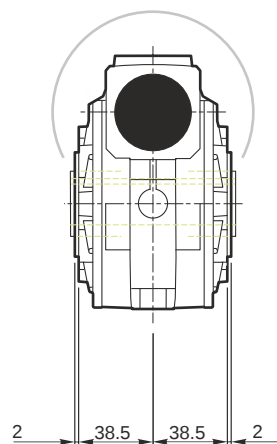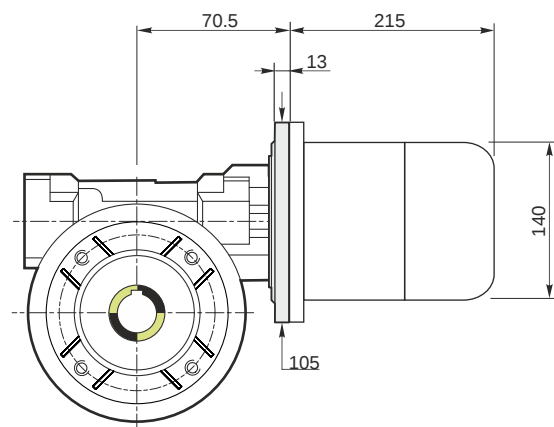


Hollow output shaft




59.99
59.971

19.021
19.000



M RS 40 PC 7 71 B14 AC 19 MT 0.37 kW 71 B4 B14 X3 B3

Mounting positions

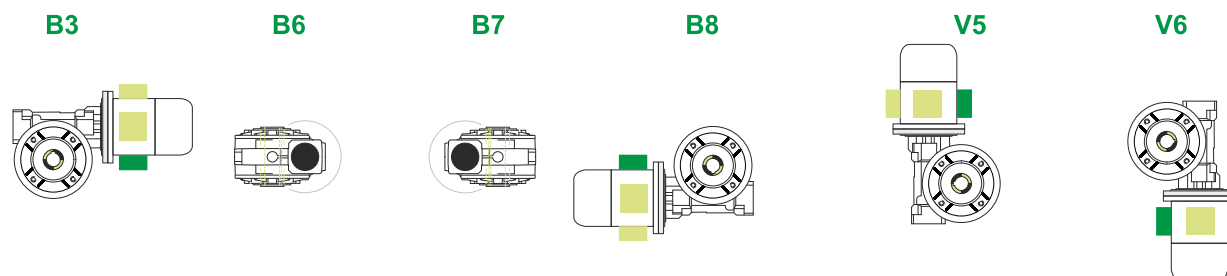

Terminal box position



0.08



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	2.5
Electric motor [kg]	6.2

Gearing data

Axial module	2.1
Number of starts	4
Lead angle	21° 36'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving