

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	14
Ratio (i=)		100
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.25
Service factor		1
Rated Power P1	[kW]	0.25

Output data

Gear unit	M RS 60 PC 100 71 B14 AC 25 MT 0.25 kW 71 A4 B14 X3 B3
------------------	---

Type		RS - Worm speed reducers
Input type		M
Size		60
Ratio (i=)		100
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	14
Rated output torque	[Nm]	83.56
Service Factor		1
Efficiency		0.49
Inertia moment	[kgm ²]	0.000104

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	5600
Taper bearings output radial load	[N]	6600
Ball bearings output axial load	[N]	1120
Taper bearings output axial load	[N]	1320

Accessories





Hollow output shaft	AC 25
---------------------	-------

Electric motor


Size		71 A4
Poles		4
Power	[kW]	0.25

Electric motor configuration

Motor flange	B14
Terminal box position	X3

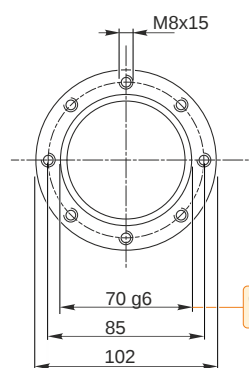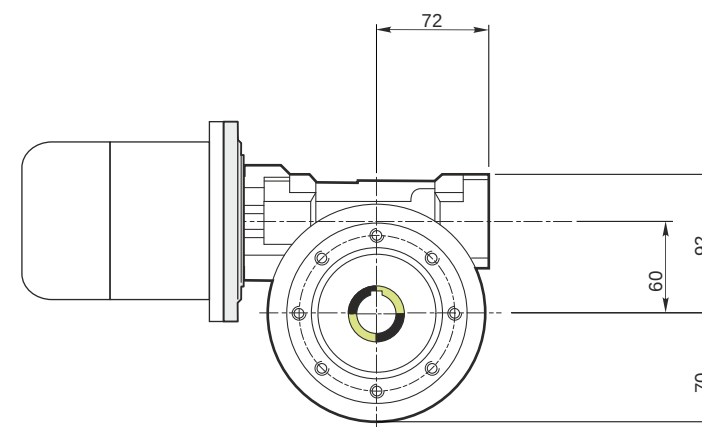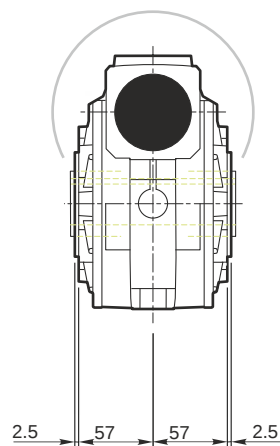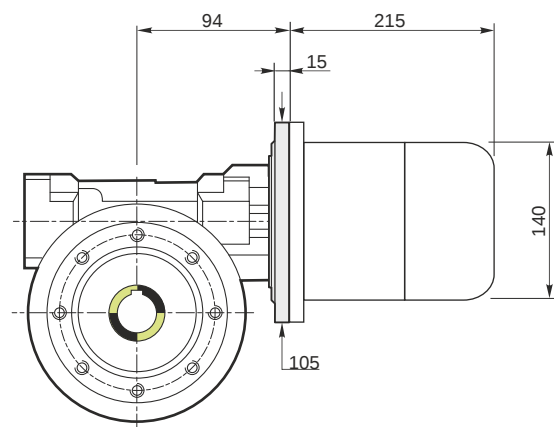


Hollow output shaft




69.99
69.971

25.021
25.000



Mounting positions

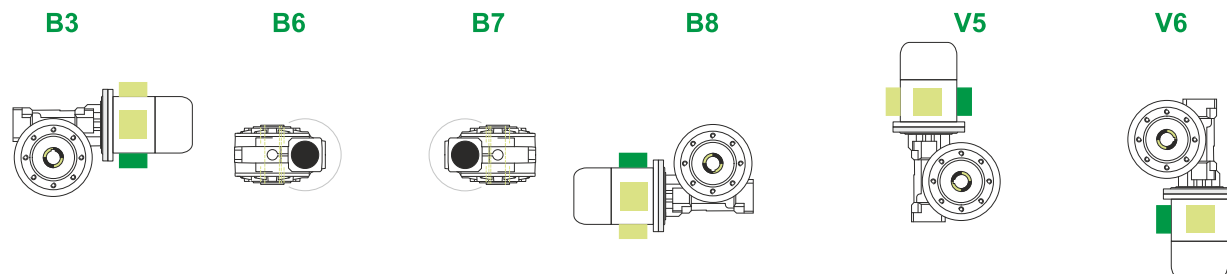

Terminal box position



0.23



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	6.5
Electric motor [kg]	6.2

Gearing data

Axial module	1
Number of starts	1
Lead angle	2° 51'
Pressure angle	20°

Backdriving

Static self-locking
No back-driving
Low dynamic back-driving

M RS 60 PC 100 71 B14 AC 25 MT 0.25 kW 71 A4 B14 X3 B3