

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	28.57
Ratio (i=)		49
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.18
Service factor		1.2
Rated Power P1	[kW]	0.21

Output data

Gear unit **M RS 40 PC 49 63 B14 AC 19 MT 0.18 kW 63 B4 B14 X3 B3**

Type		RS - Worm speed reducers
Input type		M
Size		40
Ratio (i=)		49
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	28.57
Rated output torque	[Nm]	34.9
Service Factor		1.2
Efficiency		0.58
Inertia moment	[kgm ²]	0.000018

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	1700
Taper bearings output radial load	[N]	2400
Ball bearings output axial load	[N]	340
Taper bearings output axial load	[N]	480

Accessories





Hollow output shaft	AC 19
---------------------	-------

Electric motor


Size		63 B4
Poles		4
Power	[kW]	0.18

Electric motor configuration

Motor flange	B14
Terminal box position	X3

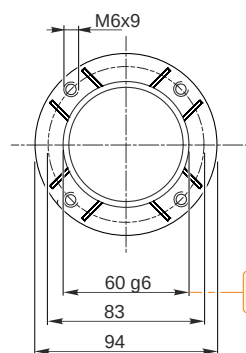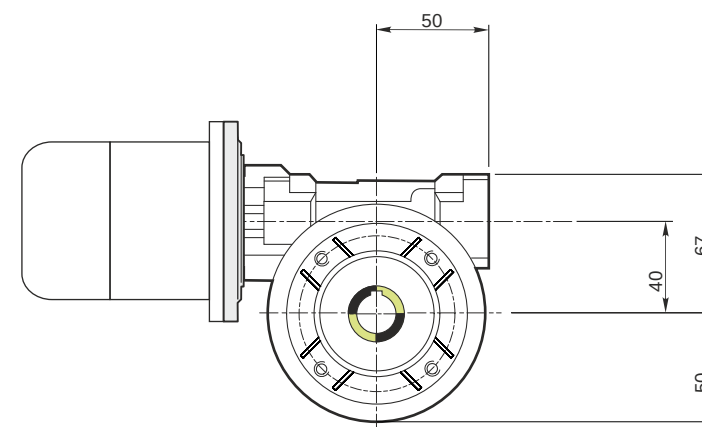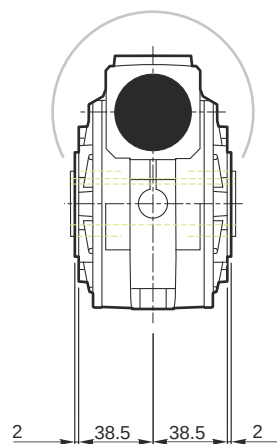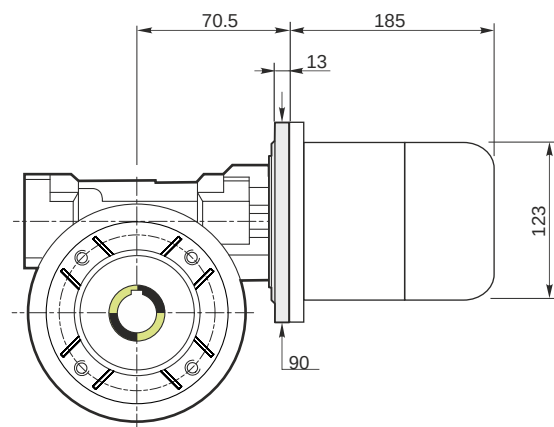


Hollow output shaft




59.99
59.971


19.021
19.000



Mounting positions

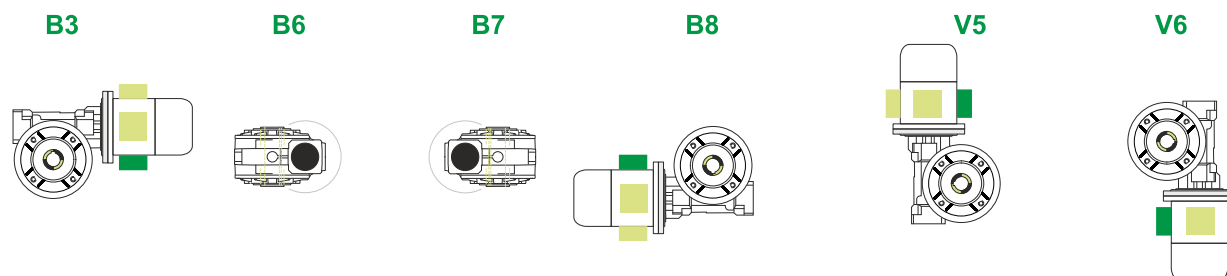

Terminal box position




0.08



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

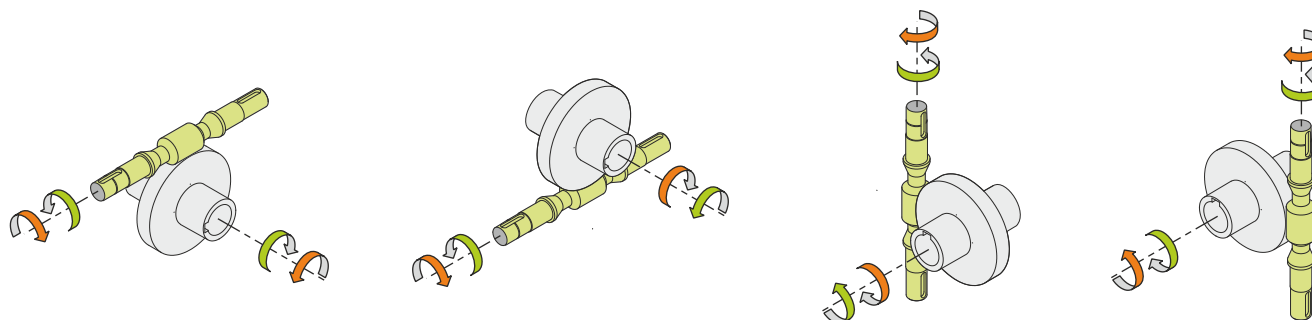

Weight

Gear unit [kg]	2.5
Electric motor [kg]	4.3

Gearing data

Axial module	1.25
Number of starts	1
Lead angle	3° 48'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving